# <u>AMERICH</u>

28

- 81/4

**Luxury Series** 

Combination

(pump and blower location only)

## **ADELLA<sup>™</sup> 6036**


**2**½

#### Always check the website for the most updated specifications: www.americh.com





Tub pictured with optional waste & overflow.

### **Builder Series**



Platinum Series



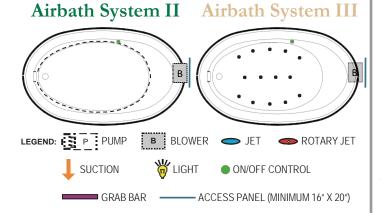

#### **INSTALLATION TIPS**

- Install according to Owner's Manual and local codes.
- Airbath III units may be  $1\frac{1}{2}$ "  $2\frac{1}{2}$ " higher than stated.
- Any whirlpool or Airbath® unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater.
- Always consult your local plumber for recommendations as installations will vary.
- Cut-out dimensions: Americh recommends waiting until the actual unit is received.

All bathtub dimensions are ± 1/2".

60 52 41

#### DIMENSIONS

22

20

60" x 36" x 22" (1524 x 914 x 559 mm) Whirlpool Operating Gallons = 37 (Liters = 140) Gallon to Overflow = 60 (Liters = 227)

MATERIAL: Acrylic (All Americh Standard colors)

TUB FLOOR: Non-Textured

**UNDERMOUNT: NO** 

#### **ELECTRICAL REQUIREMENTS**

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

#### **OPTIONAL ACCESSORIES**

- Chromatherapy\*
- High Density Insulation\*
- iBath Sound System
- Inline Heater (whirlpool only)
- Jets: Additional or Rotary\*
- Ozone System (whirlpool and/or Airbath only)
- Remote Control Upgrade (select series only)
- Serenity Soak (tub only)
- Syllent Pump with Heated Air\*
- Trim Kit Upgrade\*
- Waste & Overflow
  - Cable Drive Overflow\*

\*Standard on Platinum Series

#### CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories Canada (cUL)
- Canadian Standards Association (CSA)

• ANSI Z124.1 • ANSI A112-19.7 • ANSI A112.19.8 Contact Americh for additional approvals.