
Submitted Model No.: **Specific Features:**



▲ Designate proper finish suffix

Spray Patterns



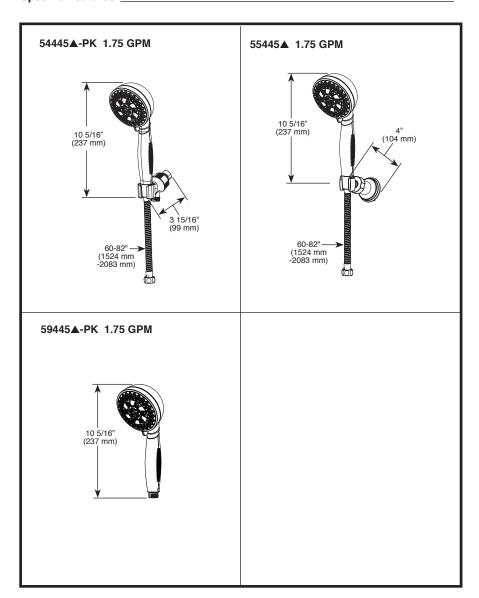







H₂Okinetic® PowerDrench® Spray

Full Body Spray

Massage Spray

Full Spray w/Massage

 Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.



see what Delta can do

HAND SHOWER

- H₂Okinetic[®] Hand Shower
 24" Wall Bar, Wall Mount, or Shower Arm Mount
- Certified Dual Check Valves

FEATURES:

■ Touch-Clean® Nozzles

STANDARD SPECIFICATIONS:

- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Hand held shower with five settings pause is a non-positive shut-off
- Adjustable shower arm mount for hands-free showering (54445-PK only)
- Wall bar with adjustable height hand shower mount (55445 only)
- 60"-82" (1524 mm 2083 mm) metal stretchable hose (51405, 54445-PK, 55445)
- ADA compliant hand shower when installed per accessibility guidelines of the act

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

ASME A112.18.1 / CSA B125.1 ◆

■ ASME A112.18.3

Indicates compliance to ICC/ANSI A117.1

• EPA WaterSense®