




Submitted Model No.:

Specific Features:

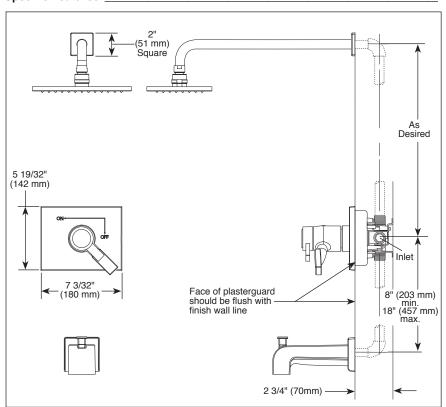





▲ Designate Proper Finish Suffix



see what Delta can do^{.,}

TUB AND SHOWER FAUCET TRIM

- Vero[®] Bath Collection TempAssure[®] Thermostatic
- Valve Only Trim (T17T053 Series)
- Shower Only Trim (T17T253 & T17T253-WE Series)
- Tub/Shower Trim (T17T453 & T17T453-WE Series)

FEATURES:

■ TempAssure® 17T thermostatic valve cartridge

STANDARD SPECIFICATIONS:

- Thermostatic wax element maintains the outlet temperature to ±3.6°F
- Must also order Multi-Choice[®] Universal rough separately (R10000)
- Back-to-back installation capability
- Lever volume control handle; temperature adjustment dial
- Graphics indicate hot/cold temperature adjustment
- Field adjustable to limit rotation into hot water zone
- 2.5 gpm @ 80 psi for standard models and 1.75 gpm @ 80 psi for models with -WE suffix
- Tub port maximum flow rate 8.6 gpm @ 60 psi with R10000-UNBX
- All parts are replaceable from the front of the valve
- Adjusts for up to 1" wall thickness
- Available extension kit (RP75136) adds up to 1 3/8" installation depth
- Shower arm overall horizontal length = 16" (406 mm), including threaded ends

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

 ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1 - Valve control only

PA WaterSense® (WE models only)

Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2018 Delta Faucet Company