

Kitchen Faucet S-2640

Installation and Service Instructions

Model Numbers

S-2640..... Chrome finish S-2640-STN Satin Nickel finish S-2640-STS...... Stainless Steel finish

Tools & Materials






Need Help?

Contact Symmons customer service at (800) 796-6667, (781) 848-2250 Email: customerservice@symmons.com Monday - Friday 8:00 am - 7:30 pm EST

Please check Symmons website for technical help, the latest product information and warranty policy. www.symmons.com/service

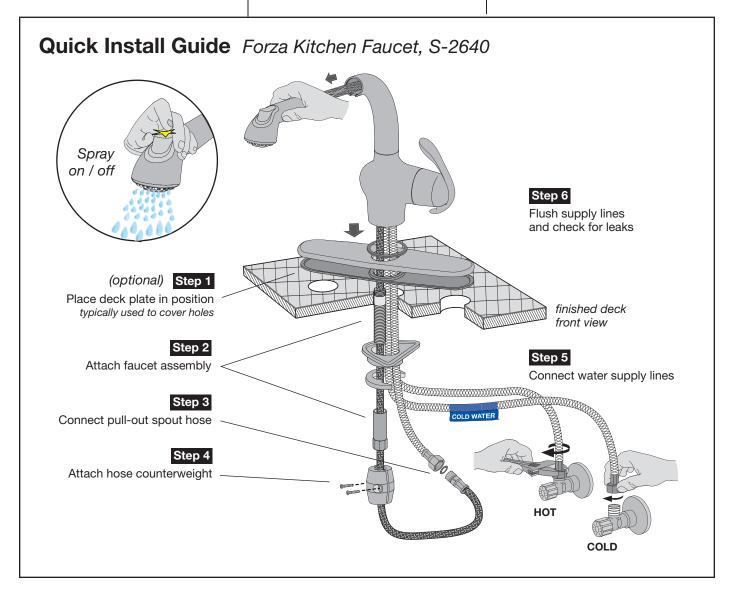


Installation Instructions


Caution: If replacing an older faucet ensure water supply is turned OFF before removing and then turn faucet handles ON to relieve water pressure.


Step 1 Place deck plate over mounting hole

Typically used to cover existing holes when faucet is being replaced. Install as required.






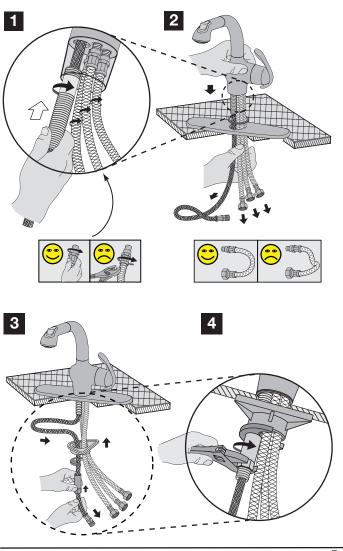

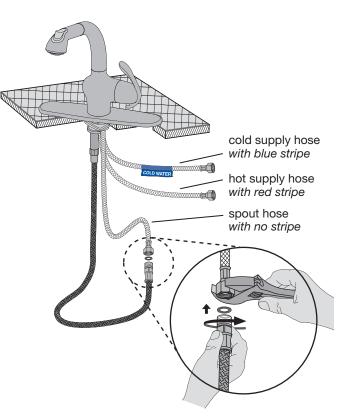




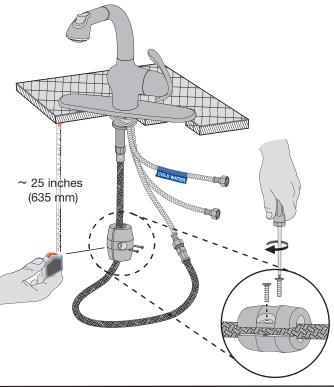


Step 3 Connect pull-out spout hose

Step 5 Connect water supply lines

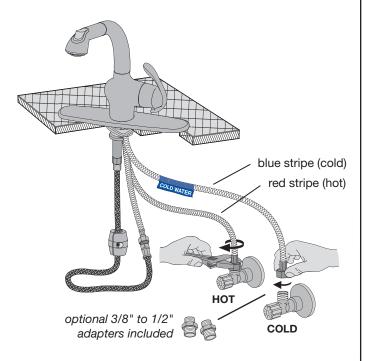

Step 6 Flush supply lines and check for leaks

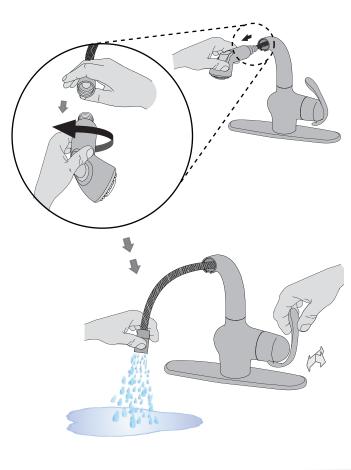


Care of faucet finish


Clean finish area by using mild soap and water or non-abrasive cleaner and then rinse immediately. A non-abrasive wax may be used to preserve finish area.

Valve cartridge replacement


Removing handle, collar and cartridge




Replacing cartridge

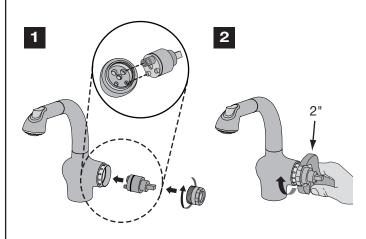

Replace collar and handle



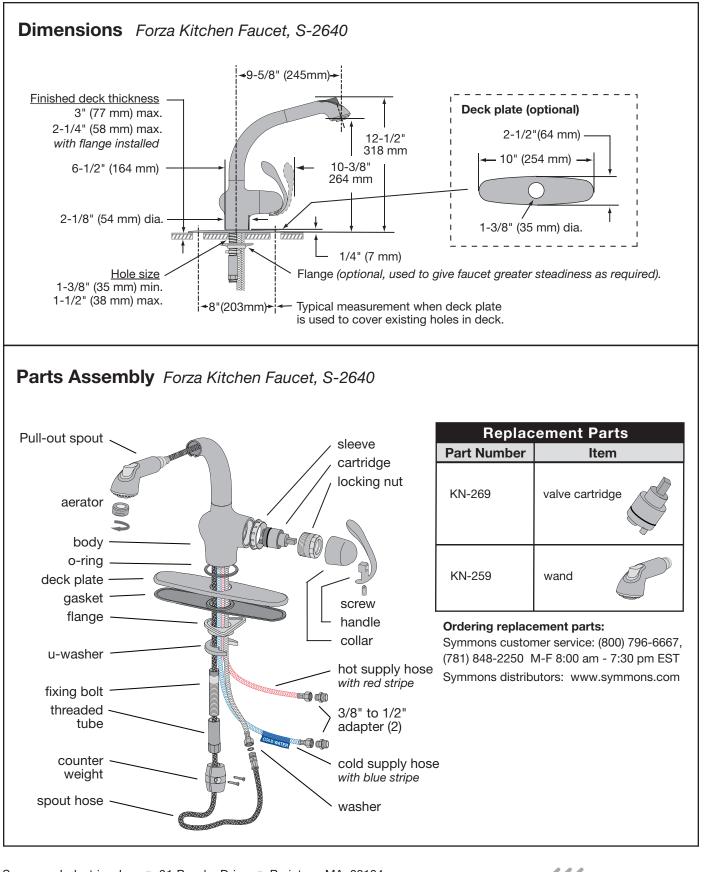



© 2007 - 2008 Symmons Industries, Inc. Printed in U.S.A.
ZV-538
120208